


# HIP


Best Security  
**CCTV SYSTEM**  
100% performance CCTV

# NVR

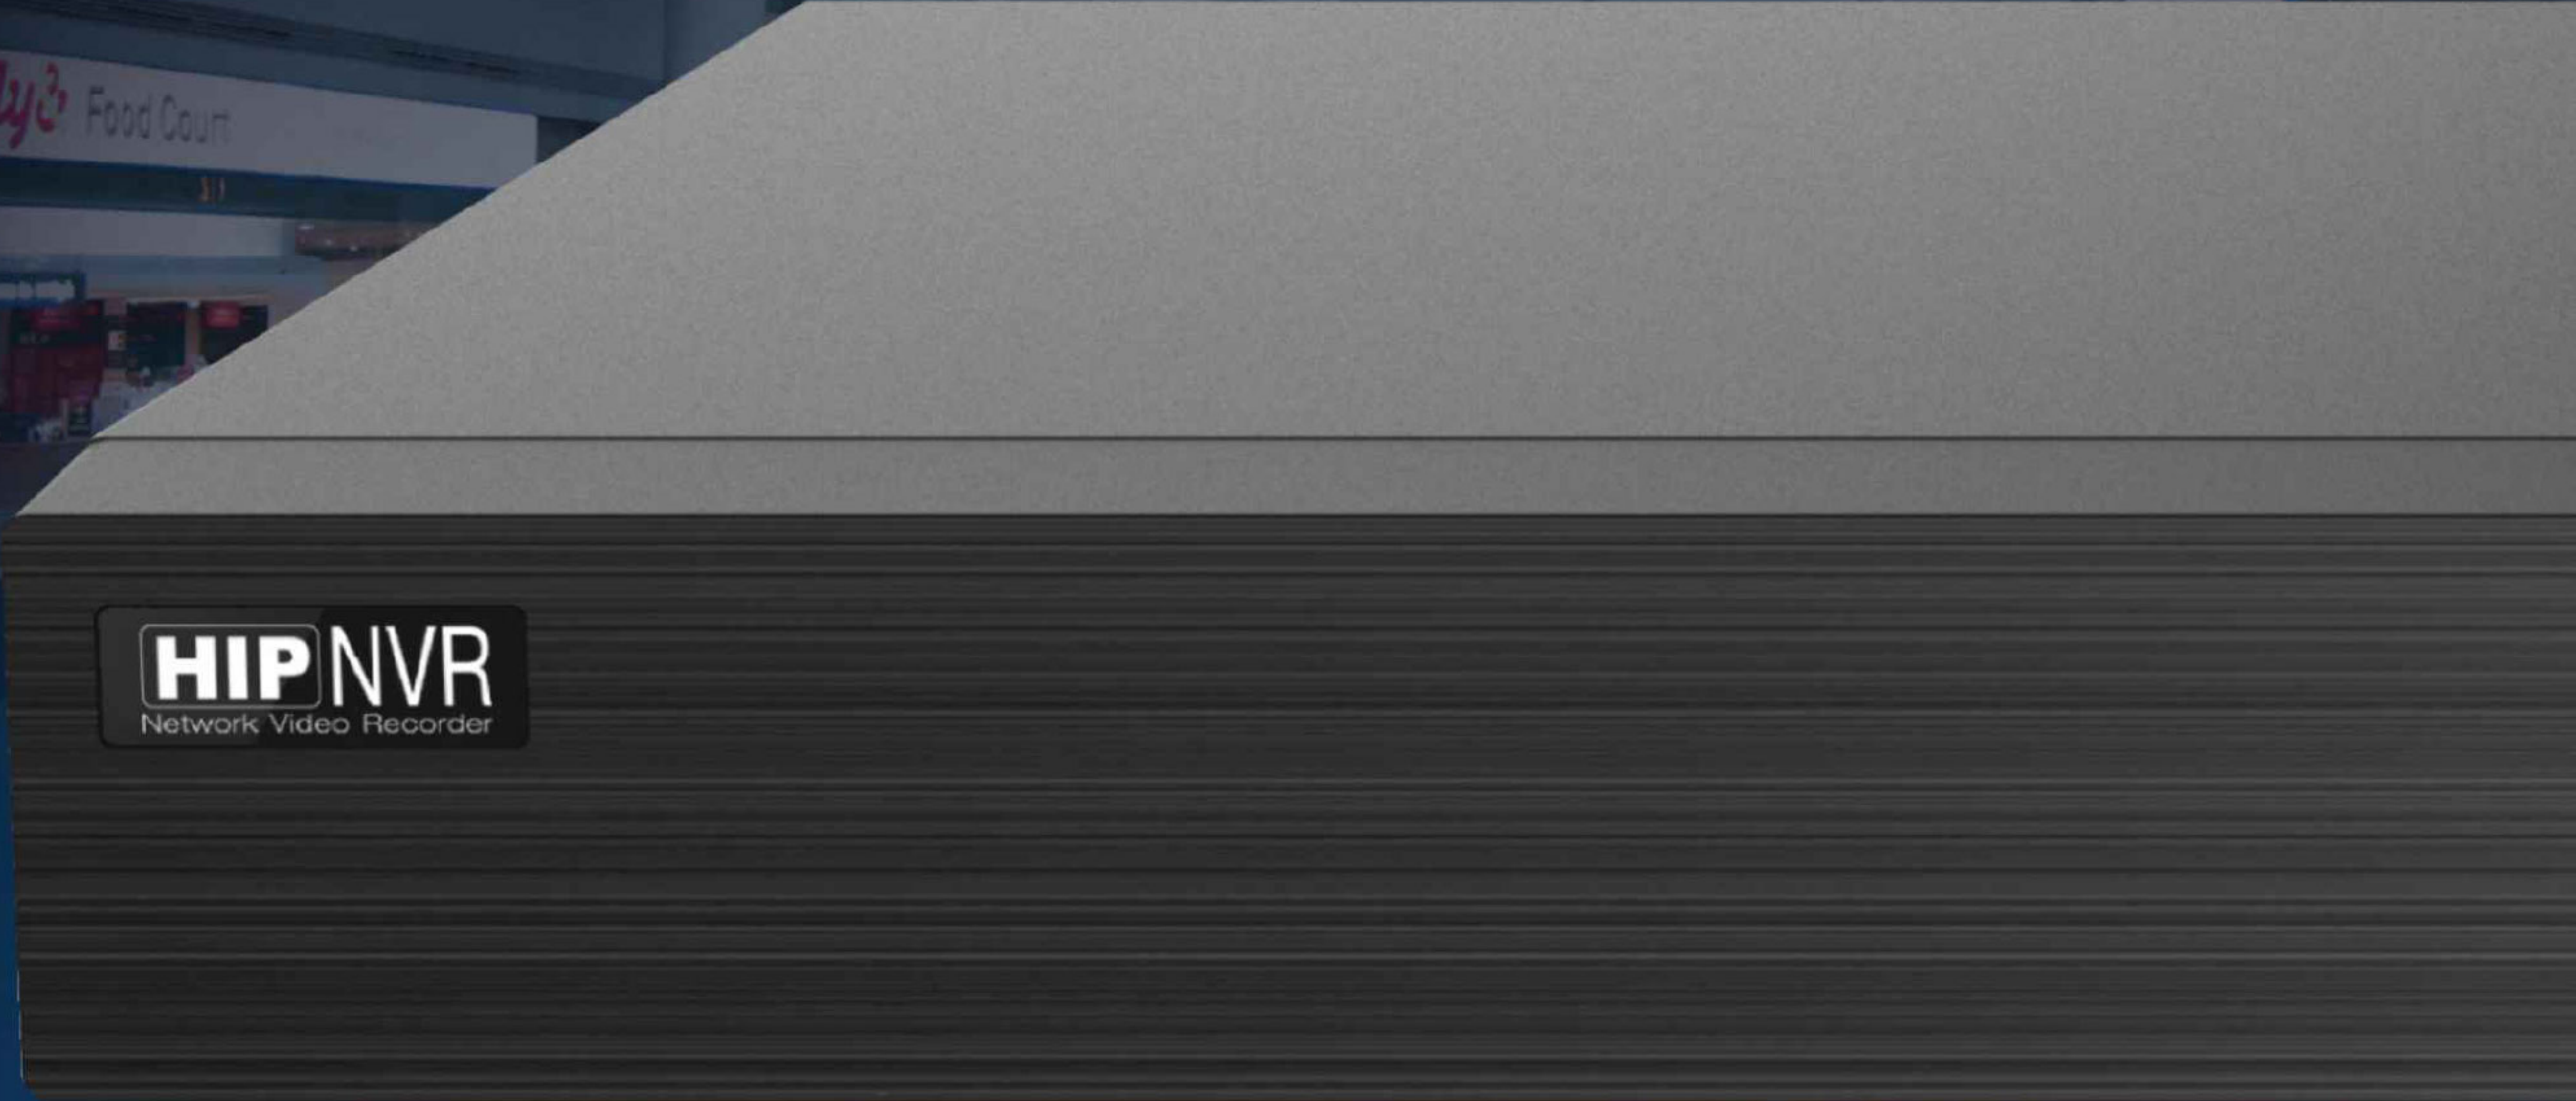

## Network Video Recorder

**5MP / 4MP / 3MP / 1080P / 960P / 720P HD NVR**

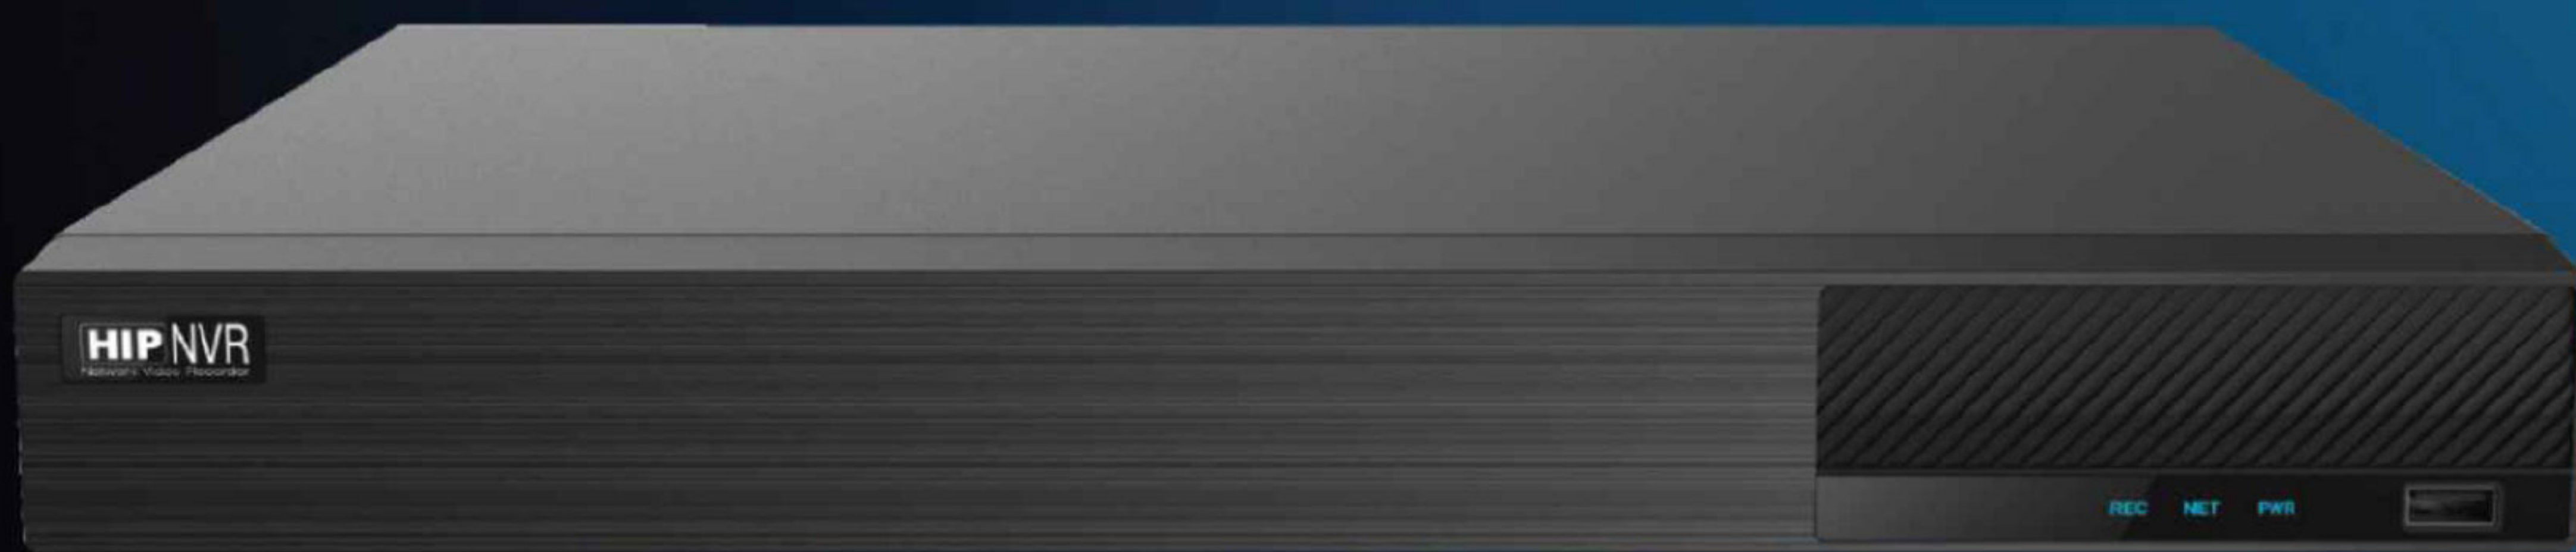

**CMTV3204H1**  
**CMTV3208H1**  
**CMTV3216H2**



- HD Output
- HD IPC
- DDNS
- Network
- PTZ
- Audio
- MIC
- Mobile
- CMS
- USB
- Mouse
- E-mail
- STD

**CMTV320** series are 4 / 8 / 16 CH 5MP / 4MP / 3MP / 1080P / 960P / 720P high definition NVRs, which adopt the most advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system. NVR CMTV32XX series support 4 / 8 / 16 CH IP input, simultaneous 4 / 8 / 16 CH playback, and 1080P high definition display. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.



# Specifications



MODEL		CMTV3204H1	CMTV3208H1	CMTV3216H2
System	Compression	Standard H.265		
	OS	Embedded Linux		
Video	Network Input	4 CH IPC input	8 CH IPC input	16 CH IPC input
	Network Access Bandwidth	40Mbps	64Mbps	80Mbps
	Network Access Format	5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps		
	Output	HDMI x 1: 1920 x 1080 / 1280 x 1024 HDMI-VGA cable optional, 1920 x 1080 / 1280 x 1024		HDMI x 1: 4K x 2k / 1920 x 1080 / 1280 x 1024; HDMI-VGA cable optional, 1920 x 1080 / 1280 x 1024
Audio	Network Input	4 CH IPC audio input	8 CH IPC audio input	16 CH IPC audio input
	2-way Audio	No		
	Local Output	RCA x 1		
Record	Record Stream	Dual stream recording		
	Resolution	5MP / 4MP / 3MP / 1080P / 960P / 720P		
	Mode	Manual, timer, motion, sensor		
Playback	Simultaneous Playback	4 CH Playback	4 CH Playback	4 CH Playback
	Search	Time slice / time / event / tag search		
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events		
	Function	Play, pause, FF, FB, digital zoom, etc.		
Alarm	Mode	Manual, sensor, motion, exception		
	Output	No		
	Triggering	Record, snap, preset, e-mail, etc.		
Network	Interface	RJ45 10 / 100 Mbps x 1		
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP		
	Web Client	Multiple users online		
Mobile Device	OS	iOS, Android		
Storage	HDD	SATA x 1, max 6T		SATA x 2, max 6T per HDD
Backup	Local Backup	U disk, USB mobile HDD		
	Network Backup	Yes		
Port	USB	USB 2.0 x 2 ( one in the front panel and the other in the rear panel )		
Others	Power Supply	DC12V		
	Consumption	<=5W ( without HDD )		
	Dimensions (mm)	255 x 210 x 42 ( W x D x H )		380 x 268 x 52 ( W x D x H )
	Work Environment	-10°C~ 50°C, 10% ~ 90% humidity		