


HIP

5MP Eyeball Network Camera (2.8mm)



มั่นใจทุกพื้นที่
พร้อมช่วยคุณ
ตลอด 24 ชม.

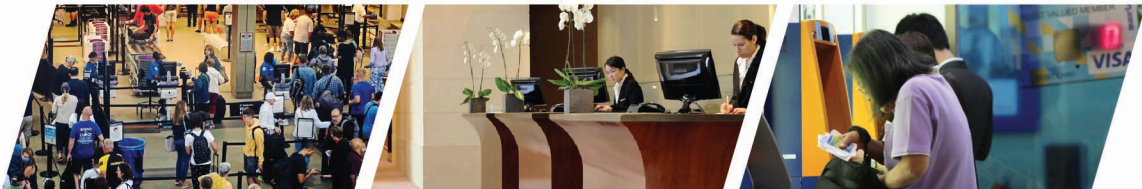


MODEL
CMU2552

ตอบโจทย์ CCTV HIP คุณภาพ
ภาพคมชัดระดับ Full HD

5.0
MegaPixel

Full HD
CAMERA

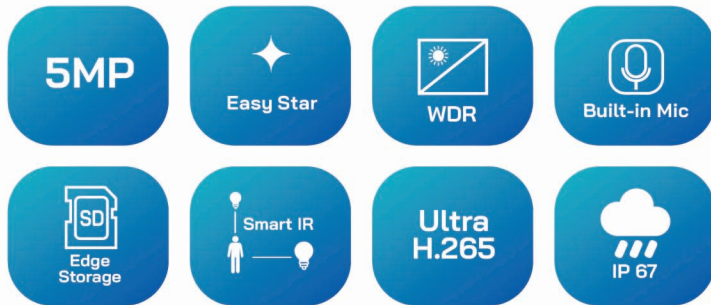

FEATURES

- ▶ High quality image with 5MP, 1/2.7" CMOS sensor
- ▶ 5MP (2880*1620)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
- ▶ Ultra 265, H.265, H.264, MJPEG
- ▶ Easystar technology ensures high image quality in low illumination environment
- ▶ 120dB true WDR technology enables clear image in strong light scene
- ▶ Support 9:16 Corridor Mode
- ▶ Built-in Mic
- ▶ Smart IR, up to 30m (98ft) IR distance
- ▶ Supports 256 G Micro SD card
- ▶ IP67 protection
- ▶ Support PoE power supply
- ▶ 3-Axis

ISO9001:2015

ขอสงวนสิทธิ์ในการเปลี่ยนแปลงรายละเอียดโดยไม่ต้องแจ้งให้ทราบล่วงหน้า บริษัท เอช ไอ พี โกลบอล จำกัด

THE BEST
SECURITY SOLUTION



5MP Eyeball Network Camera (2.8mm) CMU2552



5MP

Easy Star

WDR

Built-in Mic

Edge Storage

Smart IR

Ultra H.265

IP 67



ใช้งานร่วมกับ Network video Record

Technical Specifications

Model	CMU1554
-------	---------

Camera

Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS
Lens	2.8mm@F1.6
Angle of View (H,V)	112.9°, 59.1°
Shutter	Auto/Manual, 1 ~ 1/100000s
Minimum Illumination	Support Easystar: Colour: 0.003Lux (F1.6, AGC ON) 0Lux with IR on
Day/Night	IR-cut filter with auto switch (ICR)
S/N	>56dB
IR Range	Up to 30m (98ft) IR range
IR On/Off Control	Auto/Manual
WDR	120dB

Video

Video Compression	Ultra 265, H.265, H.264
Resolution	Main Stream: 5MP (2880*1620), Max 25fps; 4MP (2560*1440), Max 25fps; 3MP (2304*1296), Max 30fps; 1080P, Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF(704*288), Max 30fps;
Video Bit Rate	128 Kbps~16 Mbps
Support	Motion Detection , Privacy Mask

Image

White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2
Digital noise reduction	2D/3D DNR
Smart IR	Supported
Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise
HLC	Supported
BLC	Supported
Defog	Digital Defog

Audio

Audio Compression	G.711
Suppression	Supported
Sampling Rate	8KHZ

Storage

Edge Storage	Micro SD, up to 256GB
Network Storage	ANR, NAS(NFS)

Network

Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, 802.1x, SNMP, ONVIF
User/Host	Up to 32 users. 2 user levels: administrator and common user Password protection, Strong password, HTTPS encryption, Export operation logs, Basic and digest
Security	authentication for RTSP, Digest authentication for HTTP, TLS 1.2, WSSE and digest authentication for ONVIF
Web Browser	Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+

Interface

Network	10/100M Base-TX Ethernet
Built-in Mic	Supported

General

Power	DC 12V±25%, PoE (IEEE 802.3af) Power consumption: Max 6.0W
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Ingress Protection	IP67

