


# HIP

## CMK50Q-FC Dual light Camera



### Feature

- ▶ ภาพคุณภาพสูงพร้อมเซ็นเซอร์ CMOS ขนาด 1/2.7" ความละเอียด 5MP
- ▶ คุณภาพของภาพสูงมองเห็นชัดแม้ในเวลากลางคืน
- ▶ กล้องมาพร้อมไมค์สามารถฟังเสียงได้
- ▶ รองรับการเชื่อมต่อแบบ POE
- ▶ ป้องกันน้ำกันฝุ่น IP66
- ▶ การตรวจจับการเคลื่อนไหวเฉพาะบุคคลเท่านั้น

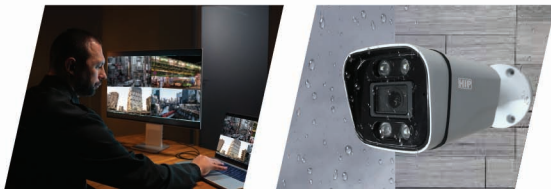

ISO9001:2015

ขอสงวนสิทธิ์ในการเปลี่ยนแปลงรายละเอียดโดยไม่ต้องแจ้งให้ทราบล่วงหน้า บริษัท เอช ไอ พี โกลบอล จำกัด

THE BEST  
SECURITY SOLUTION



## Specifications

CMK50Q-FC | **HIP**  
Dual light Camera

<b>Model</b>	CMK50Q-FC
<b>Product Name</b>	Dual light Camera
<b>System</b>	DSP Dual Core A7 1.2GHz
<b>Structure</b>	CMOS 1/2.7" 5.0 megapixel,
<b>Sensor</b>	4.0mm
<b>Lens</b>	H. 265/H. 264 video encoding, supports three scene mode selections; supports digital wide dynamic
<b>Video</b>	range; supports 2D and 3D noise reduction
<b>Compression</b>	2880x1620@25Fps,2560x1440@25Fps,2304x1296@25FPS,1920x1080 @25FPS,1920x1080@30FPS
<b>Frame Rate</b>	Main stream: 2880x1620 (default), 2560x1440, 2304x1296, 1080P, 720P
<b>Resolution</b>	Sub stream: 720P, D1 (default), 640x360, 2CIF, CIF
<b>Audio</b>	Supports G. 711u, G. 711a codec standards
<b>Protocol</b>	PPPoE, IPv4, IPv6, TCP, UDP, DHCP, RTP, RTSP, DNS, DDNS, NTP, port mapping, GB28181
<b>WDR</b>	120dB
<b>Day/Night</b>	IR-cut filter with auto switch (ICR)
<b>Functions</b>	Support Web configuration, support OSD, support real-time video transmission, support motion detection alarm linkage
<b>Support</b>	ONVIF
<b>Client</b>	Support mobile iOS, Android, PC client
<b>Other</b>	Human shape detection light alarm

## External Parameters

<b>Fill Light</b>	2 infrared + 2 white lights (infrared at night, full color when meeting people)
<b>Network</b>	1*RJ4510M/100M Ethernet
<b>Lightning</b>	The power supply and network are fully protected against lightning strikes. The front-end power input is protected against lightning strikes, anti-static, and anti-reverse connection, and supports 18V shutdown voltage protection.
<b>Power</b>	DC 12V+25%, PoE (IEEE 802.3af) Supports anti-reverse connection, overvoltage, overcurrent protection, input short circuit protection
<b>Working Environment</b>	-400~+850
<b>Protection</b>	Protection : IP66
<b>Power consumption</b>	Daytime <1.5W Max Nighttime <4.7W Max
<b>Dimensions (LxWxH)</b>	65mm*58mm*183mm
<b>Weight</b>	Body weight: 315g Weight with packaging: 365g